


100328

Connection Diagrams

24-Pin DIP

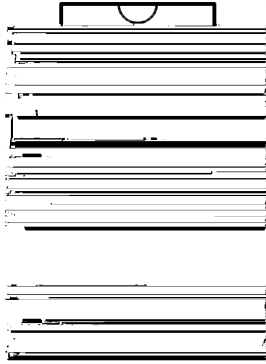

DS100295-2

Absolute Maximum Ratings (Note 5)

If Military/Aerospace specified devices are required,
please contact the National Semiconductor Sales Office/

Military Version

Military Version
ECL-to-TTL AC Electrical Characteristics


Test Circuitry (TTL-to-ECL)

Switching Waveforms (TTL-to-ECL)

Test Circuitry (ECL-to-TTL)

Switching Waveforms (ECL-to-TTL) (Continued)

Physical Dimensions inches (millimeters) unless otherwise noted

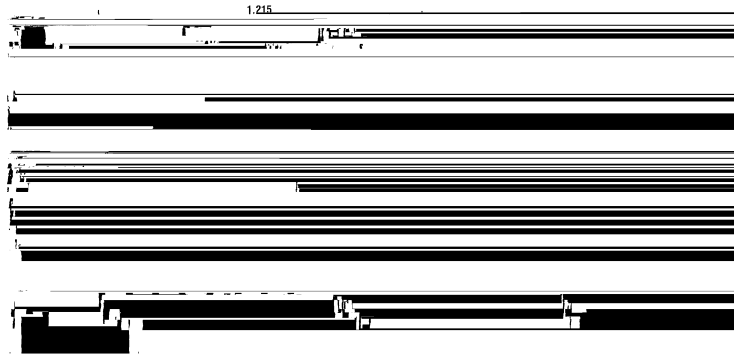

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or sys-