

54ABT373

Octal Transparent Latch with TRI-STATE® Outputs

General Description

Functional Description

Absolute Maximum Ratings

AC Electrical Characteristics

Capacitance

Capacitance (Continued)

t_{HOLD}

Dashed lines represent design characteristics; for specified guarantees, refer to AC Characteristics Tables.


Capacitance

Capacitance (Continued)

t_{PZH} vs Load Capacitance
 $T_A = 25^\circ\text{C}$, 8 Outputs Switching
OE to Output



t_{PZL} vs Load Capacitance
 $T_A = 25^\circ\text{C}$, 8 Outputs Switching
OE to Output

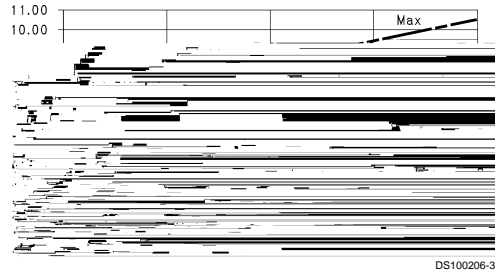


Dashed lines represent design characteristics; for specified guarantees, refer to AC Characteristics Tables.

Capacitance


AC Loading

Physical Dimensions

Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

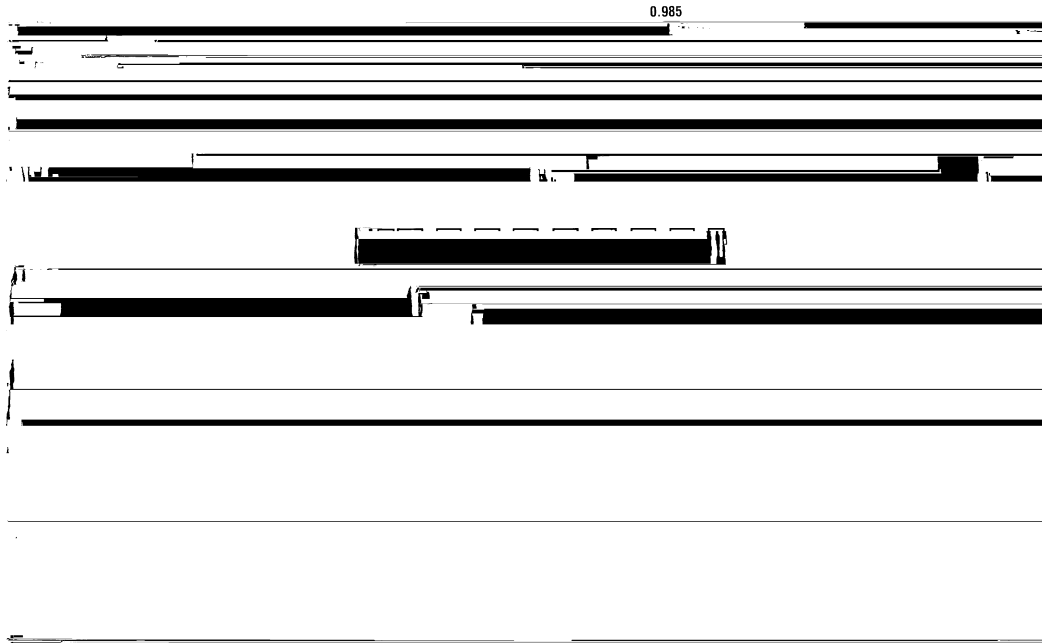

20-Lead Ceramic Dual-In-Line (D)
NS Package Number J20A

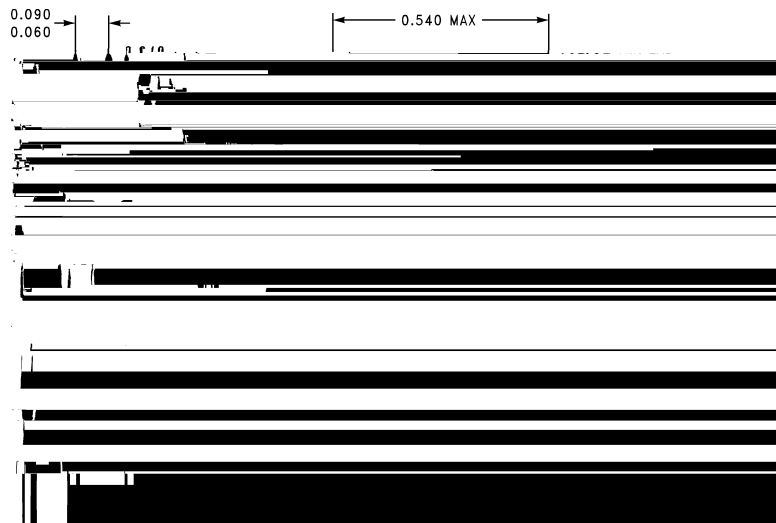

20-Lead Ceramic Flatpak (F)

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or sys-