

Logic Symbols


Functional Description

In the transceiver mode, data present at the HIGH impedance port may be stored in either the A or B register or both. The select (SAB, SBA) controls can multiplex stored and

AC Electrical Characteristics

Physical Dimensions inches (millimeters)

Physical Dimensions inches (millimeters) (Continued)

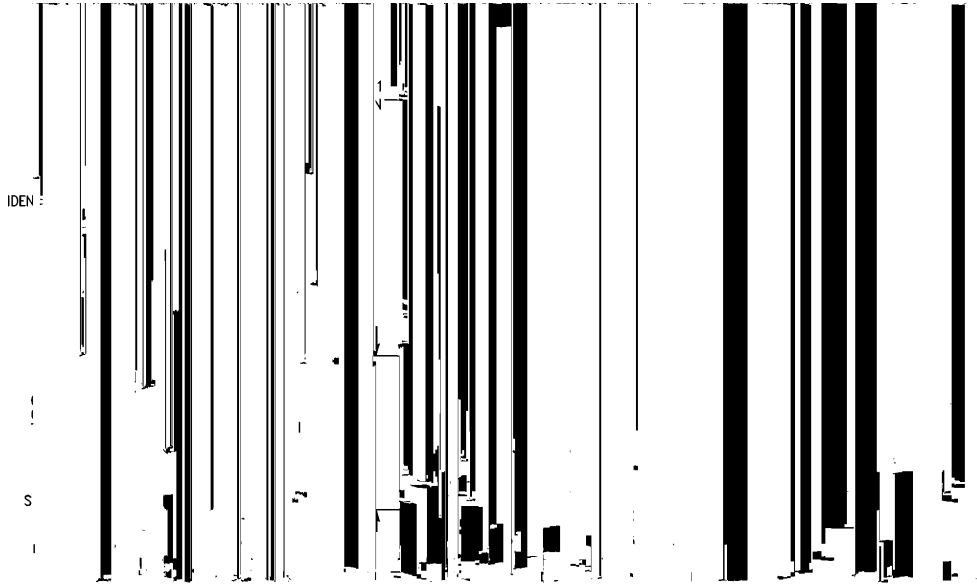

24 Lead (0.300)

54F/74F651