


Typical Performance Characteristics

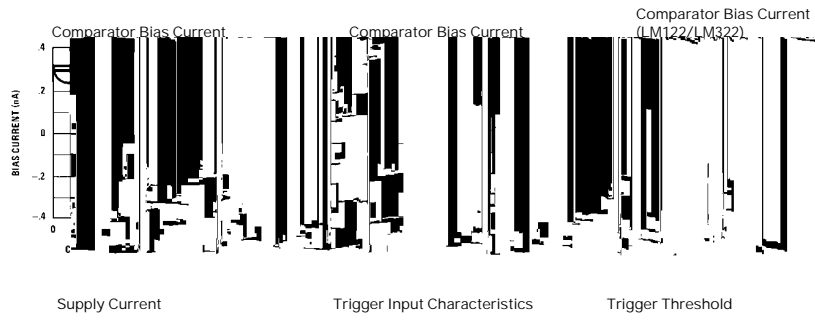

Output Transistor Saturation
Characteristics at Low Currents


Schematic Diagram

Functional Diagram



TLA17768±9

Timing Diagram

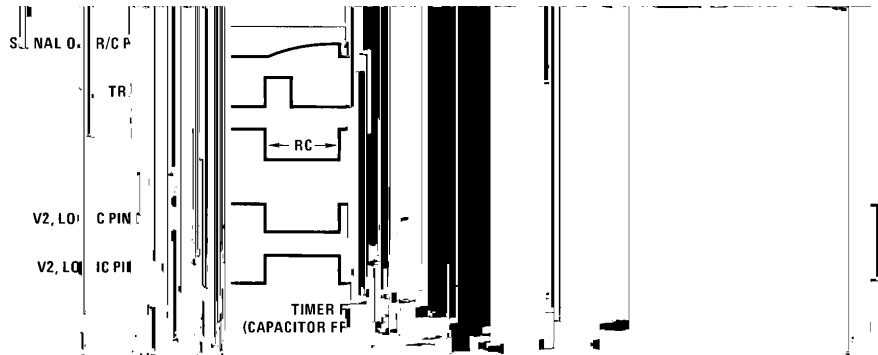

Pin Function Description (Continued)

trollers. Typical temperature drift of the reference is less than 0.01%/

Pin Function Description

Typical Applications (Continued)

The average charging current through R_t is about 30 nA, so

This datasheet has been download from:

www.datasheetca