

(T_A = +25°C unless otherwise noted)

Operating

Part Number Pack Temperature Max Quiescent Current Max Min Min Min

[REDACTED]

+V_{cc} V_{cc} MSB
R1 R2 R3 R4 B5 R6 R7 R8

Electrical Characteristics

100


DAC-08A

DAC-08

Power Supply Sensitivity

1V - 4.5V to 18V

%AES

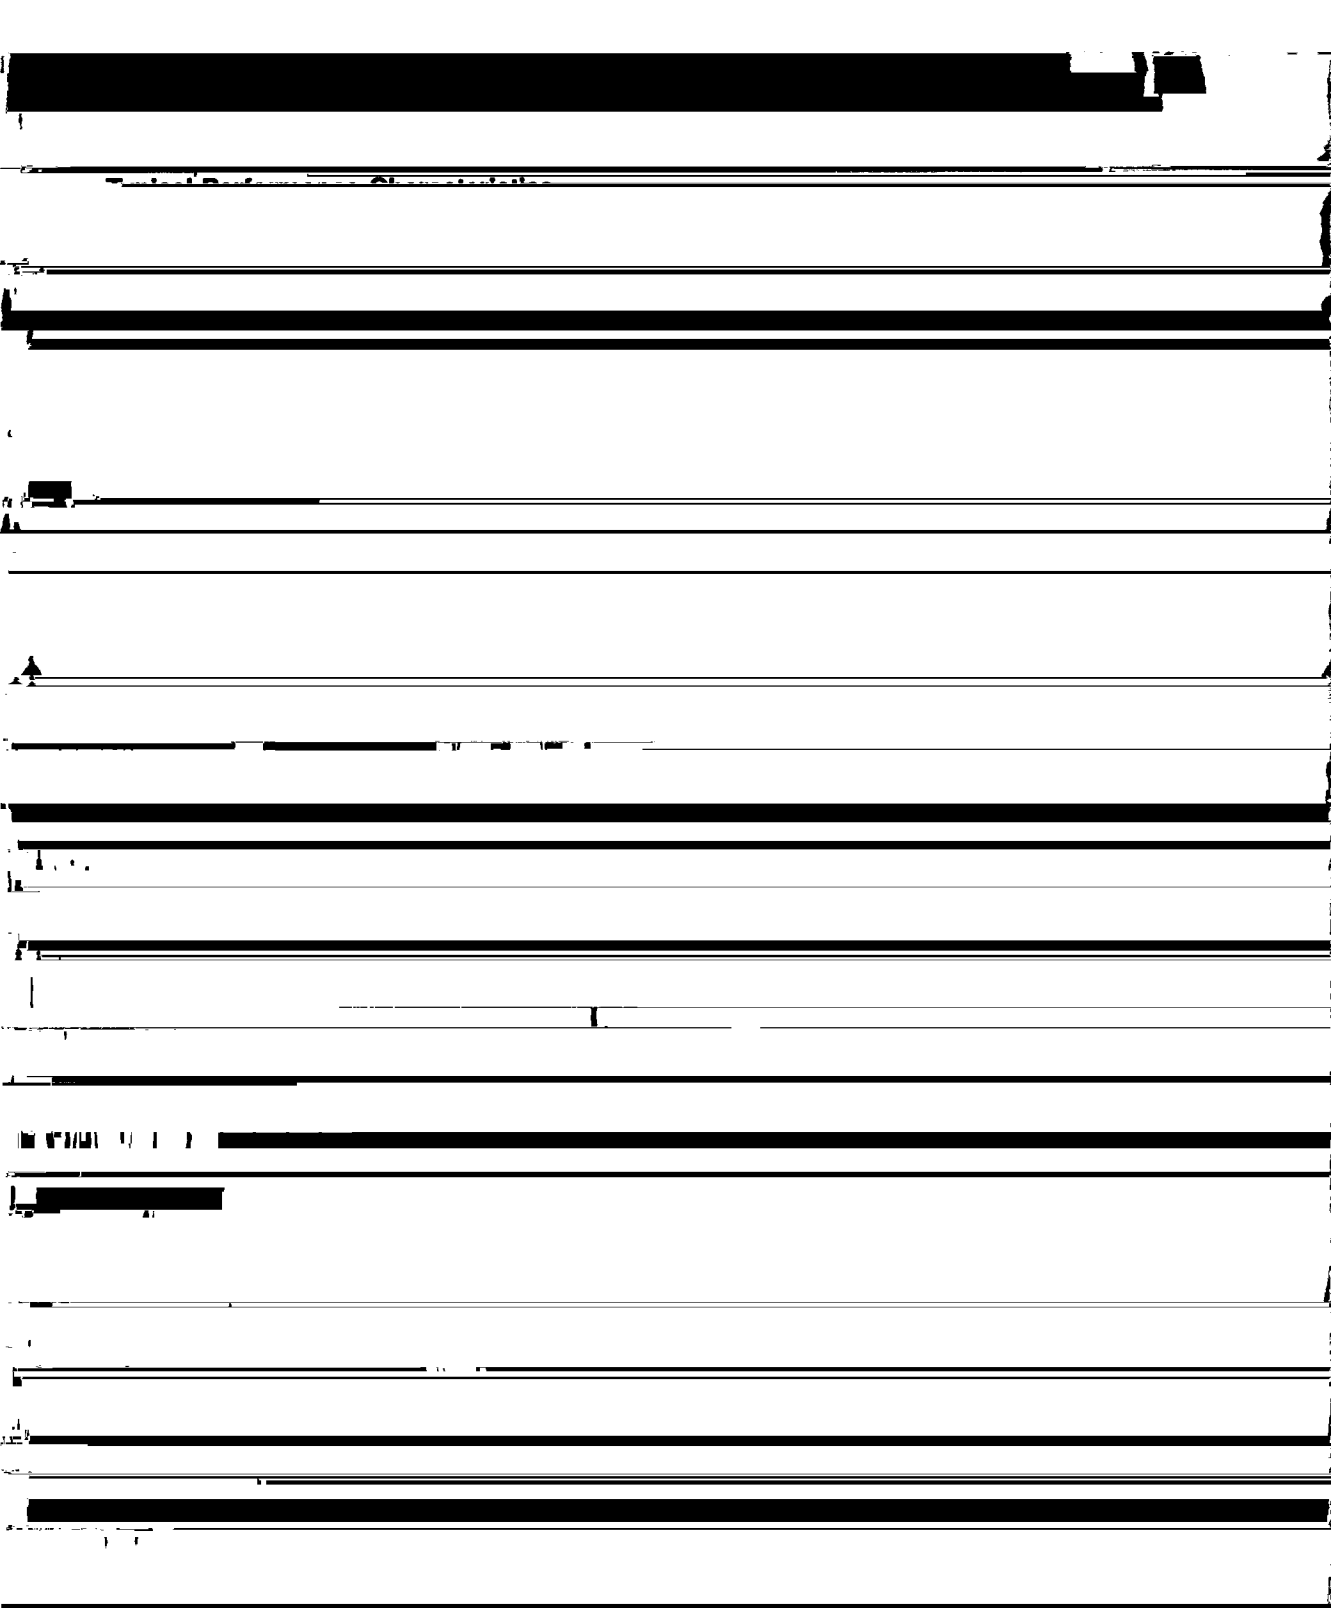

DAC08


Application Information

Reference Amplifier Set-up

Reference Amplifier Set-up

DAC08

Typical Applications

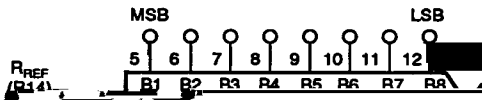

Typical Applications (Continued)

7.42

DACOR

For complementary content, see the corresponding book (DAG)

255

